



Yuasa Technisches Datenblatt

Yuasa YBX3056 - YBX3000 SMF Batteries

Leistung

Spannung	12V
Kapazität 20 Std	36Ah
Kaltstartstrom (A) EN1	330A

Abmessungen

Länge	187mm
Breite	137mm
Höhe	225mm

Maße und Gewichte

Mean Weight with Acid	9kg
Gewicht (trocken)	-
Säure Volumen	-



Gehäuseeigenschaften

Gehäusotyp	JIS B19 + B1
Batteriehälter	B1
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	-
Deckel Typ	SMF Double Lid


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	3A


Anschlusspol Typ

T1/T3


Standard DIN Post



Remove T1 adapter for T3




Zellenanordnung

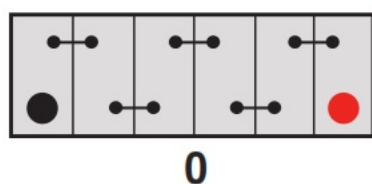

Batteriehälter

B1

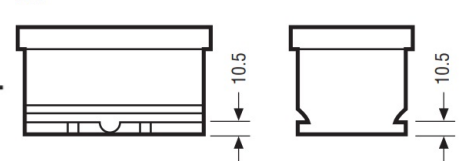

Ausstellungsdatum: 12/05/2016 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3056 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	36Ah
Cold Cranking Amps (EN1)	330A

Dimensions

Length	187mm
Width	137mm
Height	225mm

Weights & Measures

Mean Weight with Acid	9kg
Dry Weight	-
Acid Volume	-



Container Features

Case Type	JIS B19 + B1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	3A


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3




Cell Assembly Layout

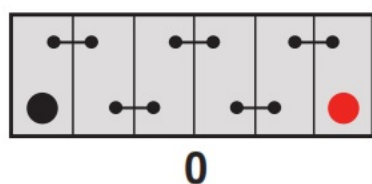

Battery Hold-down

B1

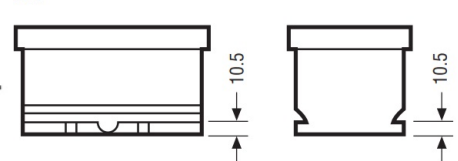

Data Sheet generated on 12/05/2016 – E&OE