



Yuasa Technisches Datenblatt

Yuasa YBX3008 - YBX3000 SMF Batteries

Leistung

Spannung	12V
Kapazität 20 Std	50Ah
Kaltstartstrom (A) EN1	450A

Abmessungen

Länge	202mm
Breite	173mm
Höhe	225mm

Maße und Gewichte

Mean Weight with Acid	12.8kg
Gewicht (trocken)	-
Säure Volumen	-



Gehäuseeigenschaften

Gehäusotyp	JIS D20
Batteriehalter	N
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	-
Deckel Typ	SMF Double Lid

Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	3A


Anschlusspol Typ

Zellenanordnung


Batteriehalter

T1



Standard DIN Post



Positive Terminal



Negative Terminal

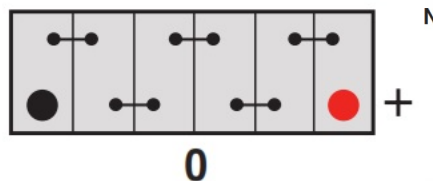

Ausstellungsdatum: 12/05/2016 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3008 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	50Ah
Cold Cranking Amps (EN1)	450A

Dimensions

Length	202mm
Width	173mm
Height	225mm

Weights & Measures

Mean Weight with Acid	12.8kg
Dry Weight	-
Acid Volume	-



Container Features

Case Type	JIS D20
Hold Down	N
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	3A


Terminal Type

T1


Standard DIN Post



Positive Terminal



Negative Terminal

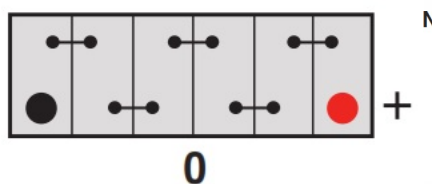

Battery Hold-down



Data Sheet generated on 12/05/2016 - E&OE