



Yuasa Technisches Datenblatt

Yuasa YBX3108 - YBX3000 SMF Batteries

Leistung

Spannung	12V
Kapazität 20 Std	50Ah
Kaltstartstrom (A) EN1	400A

Abmessungen

Länge	202mm
Breite	173mm
Höhe	225mm

Maße und Gewichte

Mean Weight with Acid	12.8kg
Gewicht (trocken)	-
Säure Volumen	-



Gehäuseeigenschaften

Gehäusotyp	JIS D20 + BH
Batteriehälter	B1
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	-
Deckel Typ	SMF Double Lid


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	3A

Anschlusspol Typ

T1


Standard DIN Post

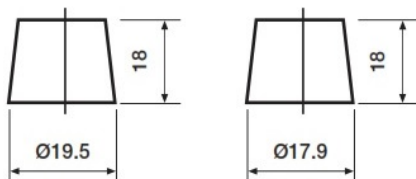

Positive Terminal


Negative Terminal

Zellenanordnung

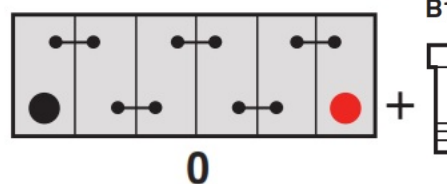

Batteriehälter

B1

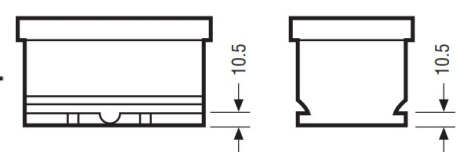

Ausstellungsdatum: 12/05/2016 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3108 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	50Ah
Cold Cranking Amps (EN1)	400A

Dimensions

Length	202mm
Width	173mm
Height	225mm

Weights & Measures

Mean Weight with Acid	12.8kg
Dry Weight	-
Acid Volume	-



Container Features

Case Type	JIS D20 + BH
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	3A

Terminal Type

T1


Standard DIN Post

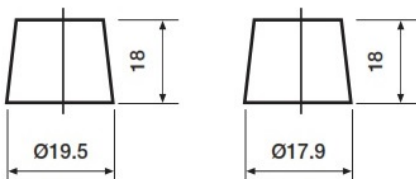

Positive Terminal

Negative Terminal


Cell Assembly Layout

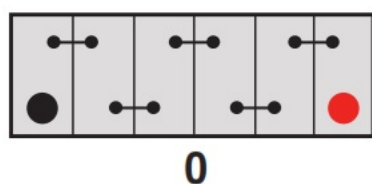

0

Battery Hold-down

B1

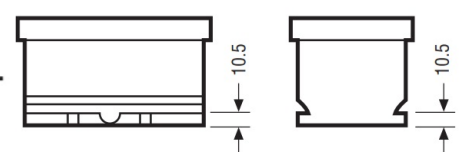

Data Sheet generated on 12/05/2016 - E&OE