



Yuasa Technisches Datenblatt

Yuasa YBX3111 - YBX3000 SMF Batteries

Leistung

Spannung	12V
Kapazität 20 Std	50Ah
Kaltstartstrom (A) EN1	530A

Abmessungen

Länge	236mm
Breite	182mm
Höhe	178mm

Maße und Gewichte

Mean Weight with Acid	12.9kg
Gewicht (trocken)	-
Säure Volumen	-



Gehäuseeigenschaften

Gehäusotyp	US Gp 58
Batteriehälter	B1
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	-
Deckel Typ	SMF Double Lid


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	4A


Anschlusspol Typ

T1


Standard DIN Post



Positive Terminal





Negative Terminal

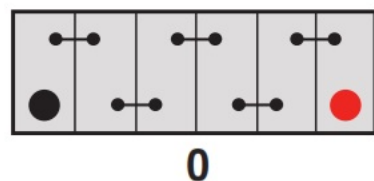

0

B1



Ausstellungsdatum: 12/05/2016 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3111 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	50Ah
Cold Cranking Amps (EN1)	530A

Dimensions

Length	236mm
Width	182mm
Height	178mm

Weights & Measures

Mean Weight with Acid	12.9kg
Dry Weight	-
Acid Volume	-



Container Features

Case Type	US Gp 58
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	4A

Terminal Type

T1


Standard DIN Post

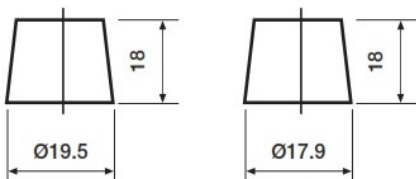

Positive Terminal

Negative Terminal


Cell Assembly Layout

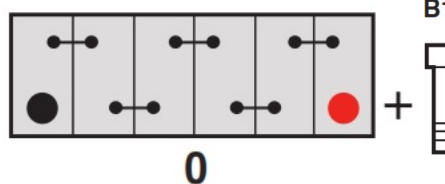

0

Battery Hold-down

B1

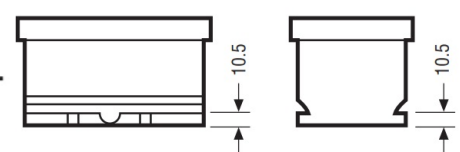

Data Sheet generated on 12/05/2016 – E&OE