



Yuasa Technisches Datenblatt

Yuasa YBX3078 - YBX3000 SMF Batteries

Leistung

Spannung	12V
Kapazität 20 Std	60Ah
Kaltstartstrom (A) EN1	550A

Abmessungen

Länge	243mm
Breite	175mm
Höhe	190mm

Maße und Gewichte

Mean Weight with Acid	14.8kg
Gewicht (trocken)	-
Säure Volumen	-



Gehäuseeigenschaften

Gehäusotyp	L2 DIN
Cell Layout	1
Batteriehälter	B3
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	-
Deckel Typ	SMF Double Lid

Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	4A

Anschlusspol Typ

Zellenanordnung

Batteriehälter

T1

Standard DIN Post



Ausstellungsdatum: 12/05/2016 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX3078 - YBX3000 SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	550A

Dimensions

Length	243mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	14.8kg
Dry Weight	-
Acid Volume	-



Container Features

Case Type	L2 DIN
Cell Layout	1
Hold Down	B3
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	4A


Terminal Type

T1


Standard DIN Post

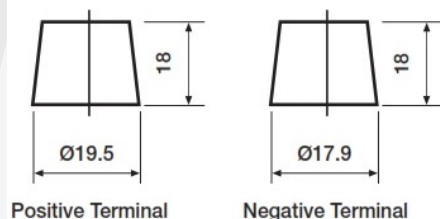

Cell Assembly Layout

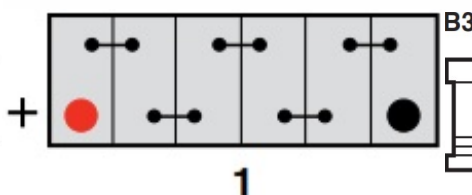

Battery Hold-down

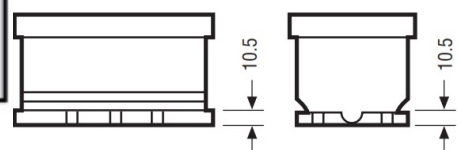

Data Sheet generated on 12/05/2016 - E&OE