



Yuasa Technisches Datenblatt

Yuasa YBX5334 - YBX5000 Silver High Performance SMF Batteries

Leistung

Spannung	12V
Kapazität 20 Std	95Ah
Kaltstartstrom (A) EN1	830A

Abmessungen

Länge	303mm
Breite	174mm
Höhe	222mm

Maße und Gewichte

Mean Weight with Acid	21.9kg
Gewicht (trocken)	-
Säure Volumen	-



Gehäuseeigenschaften

Gehäusotyp	D31 JIS
Cell Layout	1
Batteriehälter	B1
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	-
Deckel Typ	SMF Double Lid

Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	5A

Anschlusspol Typ

Zellenanordnung

Batteriehälter

T1

Standard DIN Post



Ausstellungsdatum: 12/05/2016 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX5334 - YBX5000 Silver High Performance SMF Batteries

Performance

Voltage	12V
Capacity (20-hour)	95Ah
Cold Cranking Amps (EN1)	830A

Dimensions

Length	303mm
Width	174mm
Height	222mm

Weights & Measures

Mean Weight with Acid	21.9kg
Dry Weight	-
Acid Volume	-



Container Features

Case Type	D31 JIS
Cell Layout	1
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	5A


Terminal Type

T1


Standard DIN Post

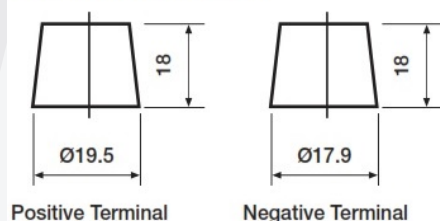

Cell Assembly Layout

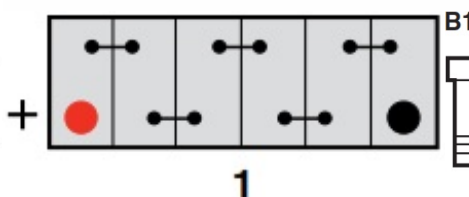

Battery Hold-down

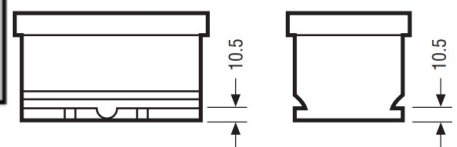

Data Sheet generated on 12/05/2016 - E&OE