



## Yuasa Technisches Datenblatt

### Yuasa YBX5335 - YBX5000 Silver High Performance SMF Batteries

#### Leistung

Spannung	12V
Kapazität 20 Std	95Ah
Kaltstartstrom (A) EN1	830A

#### Abmessungen

Länge	303mm
Breite	174mm
Höhe	222mm

#### Maße und Gewichte

Mean Weight with Acid	21.9kg
Gewicht (trocken)	-
Säure Volumen	-



#### Gehäuseeigenschaften

Gehäusotyp	D31 JIS
Batteriehälter	B1
Ladezustandsanzeige	✓
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	-
Deckel Typ	SMF Double Lid

#### Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	✓
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	5A


#### Anschlusspol Typ

#### Zellenanordnung


#### Batteriehälter

#### T1


Standard DIN Post



Positive Terminal





Negative Terminal

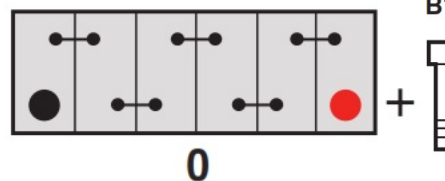

0

#### B1



Ausstellungsdatum: 12/05/2016 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX5335 - YBX5000 Silver High Performance SMF Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	95Ah
Cold Cranking Amps (EN1)	830A

#### Dimensions

Length	303mm
Width	174mm
Height	222mm

#### Weights & Measures

Mean Weight with Acid	21.9kg
Dry Weight	-
Acid Volume	-

#### Container Features

Case Type	D31 JIS
Hold Down	B1
State of Charge Indicator	✓
Handles	✓
End Venting	✓
Semi-Traction Features	-
Lid Type	SMF Double Lid

#### Technology


Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	✓
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	5A



#### Terminal Type

##### T1


Standard DIN Post

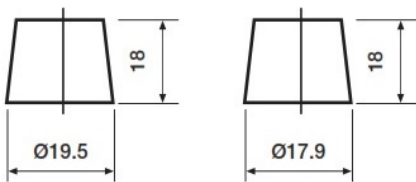

Positive Terminal

Negative Terminal


#### Cell Assembly Layout

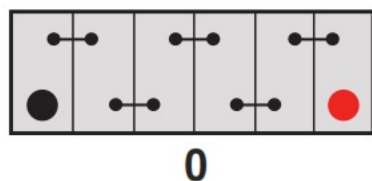

0

#### Battery Hold-down

##### B1

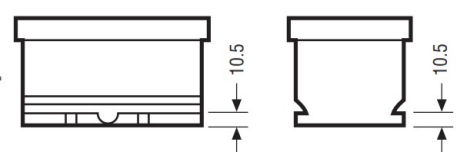

Data Sheet generated on 12/05/2016 - E&OE