



Yuasa Technisches Datenblatt

Yuasa YBX7055 - YBX7000 EFB Start Stop Plus Batteries

Leistung

Spannung	12V
Kapazität 20 Std	40Ah
Kaltstartstrom (A) EN1	340A

Abmessungen

Länge	197mm
Breite	128mm
Höhe	227mm

Maße und Gewichte

Mean Weight with Acid	11.5kg
Gewicht (trocken)	-
Säure Volumen	2.7 litres



Gehäuseeigenschaften

Gehäusotyp	B20 JIS EFB (M42R)
Cell Layout	1
Batteriehälter	N
Ladezustandsanzeige	-
Tragegriffe	-
Entgasung	-
Semi Traktionseigenschaften	-
Deckel Typ	Flat Lid


Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	-
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	2A


Anschlusspol Typ

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Zellenanordnung

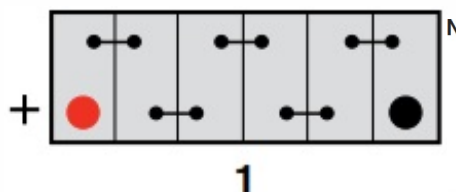

Batteriehälter



Ausstellungsdatum: 12/05/2016 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX7055 - YBX7000 EFB Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	40Ah
Cold Cranking Amps (EN1)	340A

Dimensions

Length	197mm
Width	128mm
Height	227mm

Weights & Measures

Mean Weight with Acid	11.5kg
Dry Weight	-
Acid Volume	2.7 litres



Container Features

Case Type	B20 JIS EFB (M42R)
Cell Layout	1
Hold Down	N
State of Charge Indicator	-
Handles	-
End Venting	-
Semi-Traction Features	-
Lid Type	Flat Lid


Technology

Flame Arrestor	✓
Technology	Ca/Ca
Separator	PE
VDA Roll Over Test	-
Vibration	V1 (30Hz/3g/2hr)
Recommended Charge Rate	2A


Terminal Type

T1/T3


Standard DIN Post



Remove T1 adapter for T3



Cell Assembly Layout

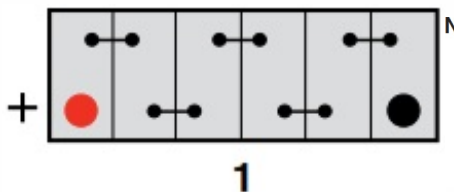

Battery Hold-down



Data Sheet generated on 12/05/2016 - E&OE