



Yuasa Technisches Datenblatt

Yuasa YBX7115 - YBX7000 EFB Start Stop Plus Batteries

Leistung

| | |
|------------------------|------|
| Spannung | 12V |
| Kapazität 20 Std | 80Ah |
| Kaltstartstrom (A) EN1 | 730A |

Abmessungen

| | |
|--------|-------|
| Länge | 317mm |
| Breite | 175mm |
| Höhe | 190mm |

Maße und Gewichte

| | |
|-----------------------|--------|
| Mean Weight with Acid | 21.4kg |
| Gewicht (trocken) | - |
| Säure Volumen | - |



Gehäuseeigenschaften

| | |
|-----------------------------|----------------|
| Gehäusotyp | L4 DIN EFB |
| Batteriehälter | B3 |
| Ladezustandsanzeige | ✓ |
| Tragegriffe | ✓ |
| Entgasung | ✓ |
| Semi Traktionseigenschaften | - |
| Deckel Typ | SMF Double Lid |


Technologie

| | |
|-------------------|------------------|
| Flammschutz | ✓ |
| Technologie | Ca/Ca |
| Separator | PE |
| VDA Überroll Test | ✓ |
| Vibration | V1 (30Hz/3g/2hr) |
| Ladestrom | 5A |

Anschlusspol Typ

T1


Standard DIN Post

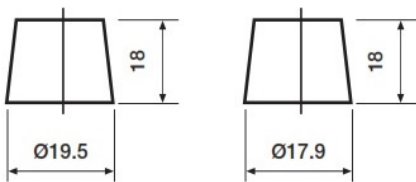

Positive Terminal


Negative Terminal

Zellenanordnung

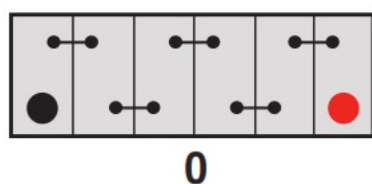

Batteriehälter

B3

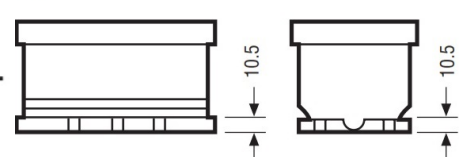

Ausstellungsdatum: 12/05/2016 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX7115 - YBX7000 EFB Start Stop Plus Batteries

Performance

| | |
|--------------------------|------|
| Voltage | 12V |
| Capacity (20-hour) | 80Ah |
| Cold Cranking Amps (EN1) | 730A |

Dimensions

| | |
|--------|-------|
| Length | 317mm |
| Width | 175mm |
| Height | 190mm |

Weights & Measures

| | |
|-----------------------|--------|
| Mean Weight with Acid | 21.4kg |
| Dry Weight | - |
| Acid Volume | - |



Container Features

| | |
|---------------------------|----------------|
| Case Type | L4 DIN EFB |
| Hold Down | B3 |
| State of Charge Indicator | ✓ |
| Handles | ✓ |
| End Venting | ✓ |
| Semi-Traction Features | - |
| Lid Type | SMF Double Lid |


Technology

| | |
|-------------------------|------------------|
| Flame Arrestor | ✓ |
| Technology | Ca/Ca |
| Separator | PE |
| VDA Roll Over Test | ✓ |
| Vibration | V1 (30Hz/3g/2hr) |
| Recommended Charge Rate | 5A |

Terminal Type

T1


Standard DIN Post

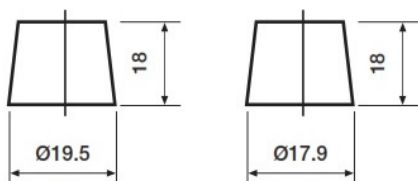


Positive Terminal

Negative Terminal

Cell Assembly Layout

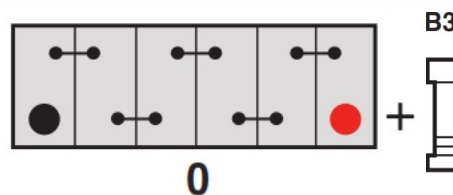

Battery Hold-down

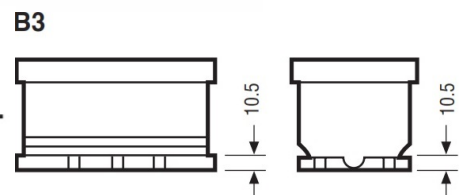

Data Sheet generated on 12/05/2016 - E&OE