



Yuasa Technisches Datenblatt

Yuasa YBX9012 - YBX9000 AGM Start Stop Plus Batteries

Leistung

Spannung	12V
Kapazität 20 Std	50Ah
Kaltstartstrom (A) EN1	520A

Abmessungen

Länge	207mm
Breite	175mm
Höhe	190mm

Maße und Gewichte

Mean Weight with Acid	15.9kg
Gewicht (trocken)	-
Säure Volumen	-



Gehäuseeigenschaften

Gehäusotyp	L1 DIN AGM
Batteriehälter	B3
Ladezustandsanzeige	-
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	✓
Deckel Typ	VRLA


Technologie

Flammschutz	✓
Technologie	Ca/Ca VRLA
Separator	AGM
VDA Überroll Test	✓
Vibration	V3 (60Hz/6g/20hr)
Ladestrom	3A

Anschlusspol Typ

T1


Standard DIN Post

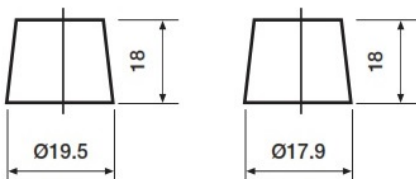

Positive Terminal


Negative Terminal

Zellenanordnung

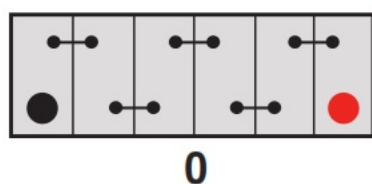

Batteriehälter

B3

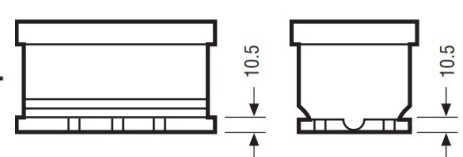

Ausstellungsdatum: 12/05/2016 - E&EO



Yuasa Technical Data Sheet

Yuasa YBX9012 - YBX9000 AGM Start Stop Plus Batteries

Performance

Voltage	12V
Capacity (20-hour)	50Ah
Cold Cranking Amps (EN1)	520A

Dimensions

Length	207mm
Width	175mm
Height	190mm

Weights & Measures

Mean Weight with Acid	15.9kg
Dry Weight	-
Acid Volume	-



Container Features

Case Type	L1 DIN AGM
Hold Down	B3
State of Charge Indicator	-
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
VDA Roll Over Test	✓
Vibration	V3 (60Hz/6g/20hr)
Recommended Charge Rate	3A

Terminal Type

T1


Standard DIN Post

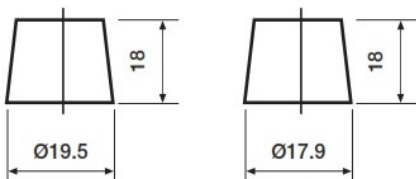


Positive Terminal

Negative Terminal

Cell Assembly Layout

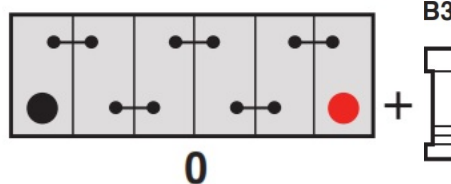

Battery Hold-down

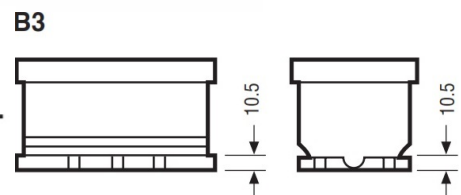

Data Sheet generated on 12/05/2016 - E&OE