



## Yuasa Technisches Datenblatt

### Yuasa YBX9027 - YBX9000 AGM Start Stop Plus Batteries

#### Leistung

Spannung	12V
Kapazität 20 Std	60Ah
Kaltstartstrom (A) EN1	680A

#### Abmessungen

Länge	242mm
Breite	175mm
Höhe	190mm

#### Maße und Gewichte

Mean Weight with Acid	16.7kg
Gewicht (trocken)	-
Säure Volumen	-



#### Gehäuseeigenschaften

Gehäusotyp	L2 DIN AGM
Batteriehälter	B3
Ladezustandsanzeige	-
Tragegriffe	✓
Entgasung	✓
Semi Traktionseigenschaften	✓
Deckel Typ	VRLA


#### Technologie

Flammschutz	✓
Technologie	Ca/Ca VRLA
Separator	AGM
VDA Überroll Test	✓
Vibration	V3 (60Hz/6g/20hr)
Ladestrom	4A

#### Anschlusspol Typ

##### T1


Standard DIN Post

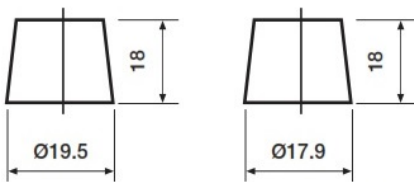


Positive Terminal

Negative Terminal

#### Zellenanordnung

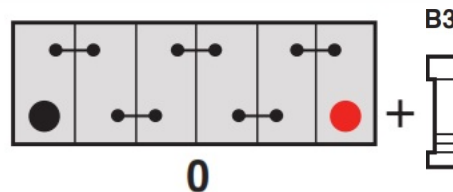

#### Batteriehälter

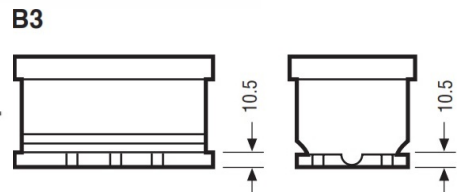

Ausstellungsdatum: 12/05/2016 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX9027 - YBX9000 AGM Start Stop Plus Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	60Ah
Cold Cranking Amps (EN1)	680A

#### Dimensions

Length	242mm
Width	175mm
Height	190mm

#### Weights & Measures

Mean Weight with Acid	16.7kg
Dry Weight	-
Acid Volume	-



#### Container Features

Case Type	L2 DIN AGM
Hold Down	B3
State of Charge Indicator	-
Handles	✓
End Venting	✓
Semi-Traction Features	✓
Lid Type	VRLA


#### Technology

Flame Arrestor	✓
Technology	Ca/Ca VRLA
Separator	AGM
VDA Roll Over Test	✓
Vibration	V3 (60Hz/6g/20hr)
Recommended Charge Rate	4A

#### Terminal Type

##### T1


Standard DIN Post

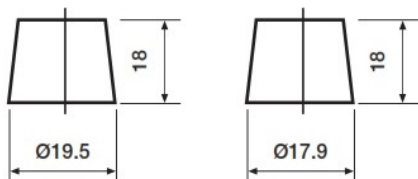

Positive Terminal


Negative Terminal

#### Cell Assembly Layout

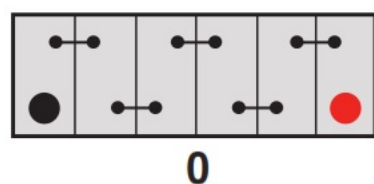

#### Battery Hold-down

##### B3

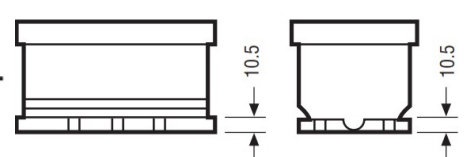

Data Sheet generated on 12/05/2016 - E&OE