



## Yuasa Technisches Datenblatt

### Yuasa YBX7054 - YBX7000 EFB Start Stop Plus Batteries

#### Leistung

Spannung	12V
Kapazität 20 Std	40Ah
Kaltstartstrom (A) EN1	340A

#### Abmessungen

Länge	197mm
Breite	128mm
Höhe	227mm

#### Maße und Gewichte

Mean Weight with Acid	11.5kg
Gewicht (trocken)	-
Säure Volumen	2.7 litres



#### Gehäuseeigenschaften

Gehäusotyp	B20 JIS EFB (M42)
Batteriehalter	N
Ladezustandsanzeige	-
Tragegriffe	-
Entgasung	-
Semi Traktionseigenschaften	-
Deckel Typ	Raised Plug


#### Technologie

Flammschutz	✓
Technologie	Ca/Ca
Separator	PE
VDA Überroll Test	-
Vibration	V1 (30Hz/3g/2hr)
Ladestrom	2A


#### Anschlusspol Typ

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Zellenanordnung

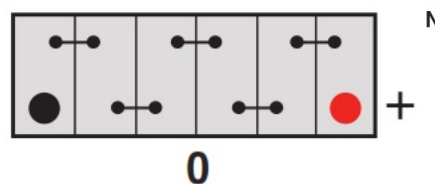

#### Batteriehalter



Ausstellungsdatum: 12/05/2016 - E&EO



## Yuasa Technical Data Sheet

### Yuasa YBX7054 - YBX7000 EFB Start Stop Plus Batteries

#### Performance

Voltage	12V
Capacity (20-hour)	40Ah
Cold Cranking Amps (EN1)	340A

#### Dimensions

Length	197mm
Width	128mm
Height	227mm

#### Weights & Measures

Mean Weight with Acid	11.5kg
Dry Weight	-
Acid Volume	2.7 litres



#### Container Features

Case Type	B20 JIS EFB (M42)
Hold Down	N
State of Charge Indicator	-
Handles	-
End Venting	-
Semi-Traction Features	-
Lid Type	Raised Plug


#### Technology

Flame Arrestor Technology	✓
Separator	Ca/Ca
VDA Roll Over Test	PE
Vibration	-
Recommended Charge Rate	V1 (30Hz/3g/2hr) 2A


#### Terminal Type

##### T1/T3


Standard DIN Post



Remove T1 adapter for T3



#### Cell Assembly Layout

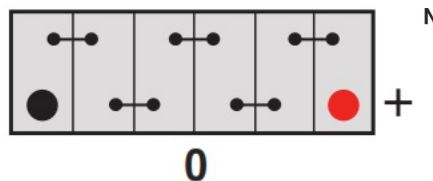

#### Battery Hold-down



Data Sheet generated on 12/05/2016 - E&OE